



Product Service

# EU-Type Examination Certificate

No. P5A 103012 0011 Rev. 00

**Holder of Certificate:** **Petzl Distribution SAS**  
**ZI de Crolles**  
105 A Cidex  
38920 Crolles  
FRANCE

**Product:** **PPE against fall from a height**  
**Dynamic mountaineering rope (EN 892) with**  
**prefabricated end termination (EN 1891-A)**

**Model(s):** **LEAD 9.8 mm**

**Tested according to:** DIN EN 1891:1998

The Certification Body of TÜV SÜD Product Service GmbH confirms that the listed product fulfils the basic requirements with Annex V (Module B) of Regulation (EU) 2016/425 on personal protective equipment according to Article 19 (PPE of category III). This certificate refers only to the submitted sample for testing and certification and on its technical documentation. The validity of this certificate based on an ongoing surveillance in accordance with Module C2 or D of Regulation (EU) 2016/425 by a Notified Body. For details see: [www.tuvsud.com/ps-cert](http://www.tuvsud.com/ps-cert)

**Test report no.:** 713165779/2

**Valid until:** 2025-06-02

**Date,** 2020-06-04

( Matthias Völz )

# EU-Type Examination Certificate


No. P5A 103012 0011 Rev. 00

## Parameters:

Rope type:	single rope
Diameter:	9.8 mm (+/- 0,3 mm)
Weight per meter:	60 g/m (+/- 2 g)
Number of falls:	7 (+/- 2)
Impact force:	8.4 kN (+/- 1 kN)
Sheath slippage:	0 mm (+/- 8 mm)
Static elongation:	9.0 % (+/- 1%)
Dynamic elongation:	35 % (+/- 4%)
Mass of outer sheath:	41 % (+/- 3%)
Material:	PA
EU type examination certificate no. of rope:	P5A 103012 0002 Rev. 01
Prefabricated stitched end termination:	Static strength: 15 kN Stitched with PES-thread 9/3 MA6904; stitching length: 31 mm stitching width: 16 mm Number of stitches: 133; End termination protection with 2 optional plastic covers: Stuart and Plastic Sleeve
Marking:	model; "read instructions"-pictogram; manufacturer logo, CE-marking; diameter; length; serial number; manufacturing date;



with cover "Plastic Sleeve" (open)

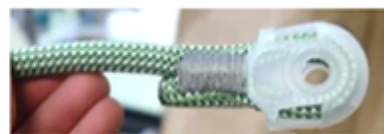

with cover "Stuart"